


### 1193

Mat = C45  
 H = 104.00  
 Max T/m = 100  
 $\alpha = 30^\circ$   
 R = 0.6


|               |         |
|---------------|---------|
| 835 mm        | 16,0 kg |
| 415 mm        | 8,0 kg  |
| 805 mm        | 16,0 kg |
| FRAZ. / SECT. |         |

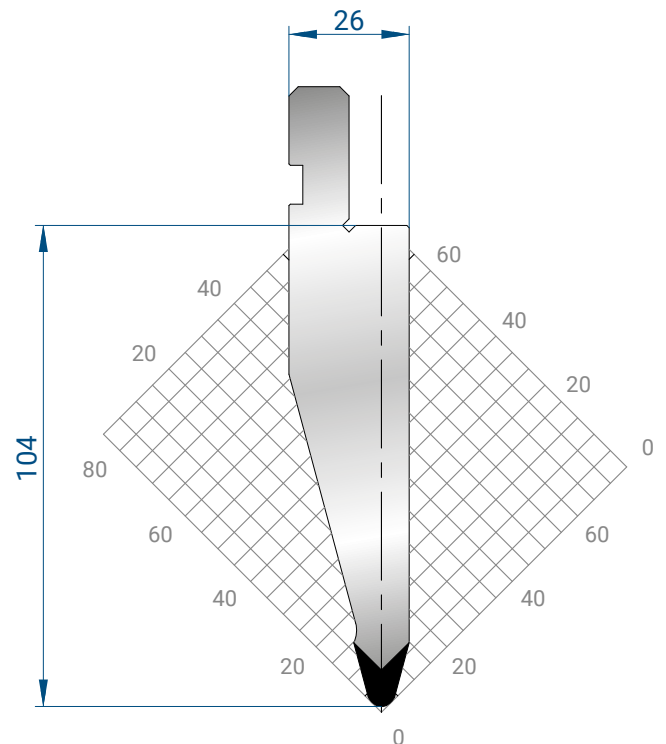

### 1289

Mat = C45  
 H = 104.00  
 Max T/m = 100  
 $\alpha = 30^\circ$   
 R = 3


|               |         |
|---------------|---------|
| 835 mm        | 16,0 kg |
| 415 mm        | 8,0 kg  |
| 805 mm        | 16,0 kg |
| FRAZ. / SECT. |         |

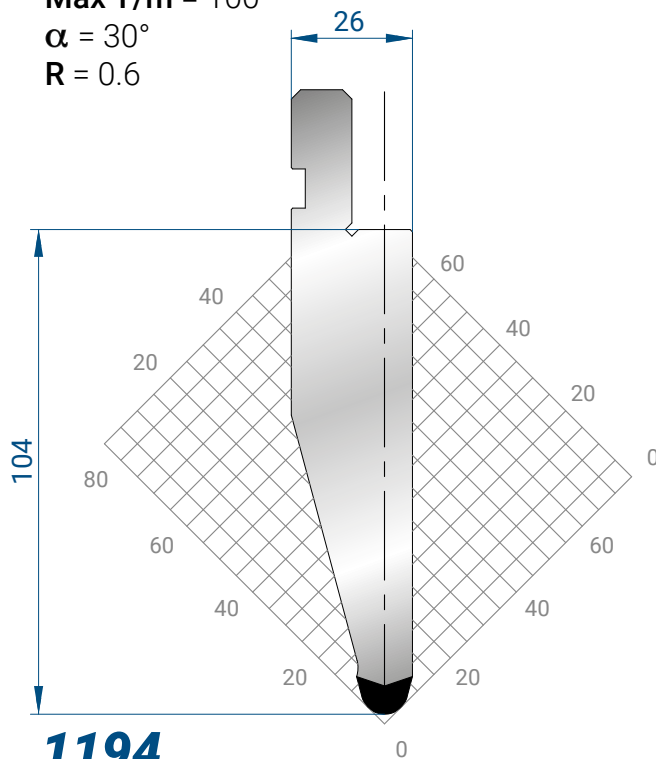

### 1194

Mat = C45  
 H = 104.00  
 Max T/m = 100  
 $\alpha = 30^\circ$   
 R = 5


|               |         |
|---------------|---------|
| 835 mm        | 16,0 kg |
| 415 mm        | 8,0 kg  |
| 805 mm        | 16,0 kg |
| FRAZ. / SECT. |         |

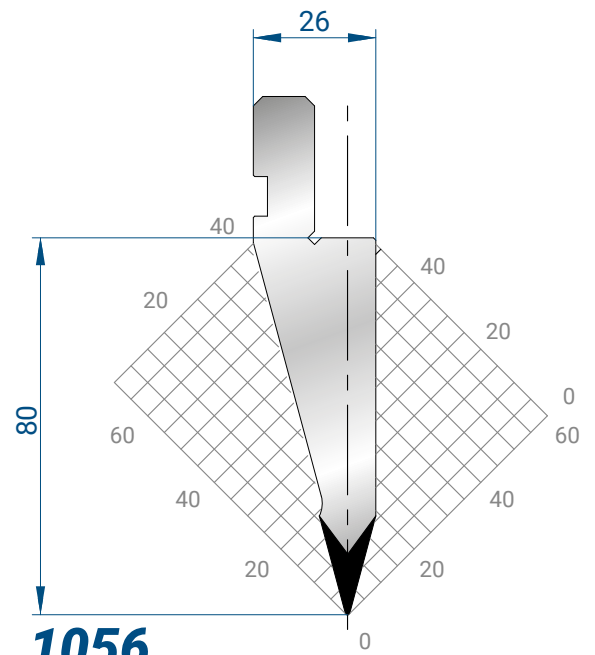

### 1056

Mat = C45  
 H = 80.00  
 Max T/m = 100  
 $\alpha = 30^\circ$   
 R = 0.5


|               |         |
|---------------|---------|
| 835 mm        | 10,0 kg |
| 415 mm        | 5,0 kg  |
| 805 mm        | 10,0 kg |
| FRAZ. / SECT. |         |

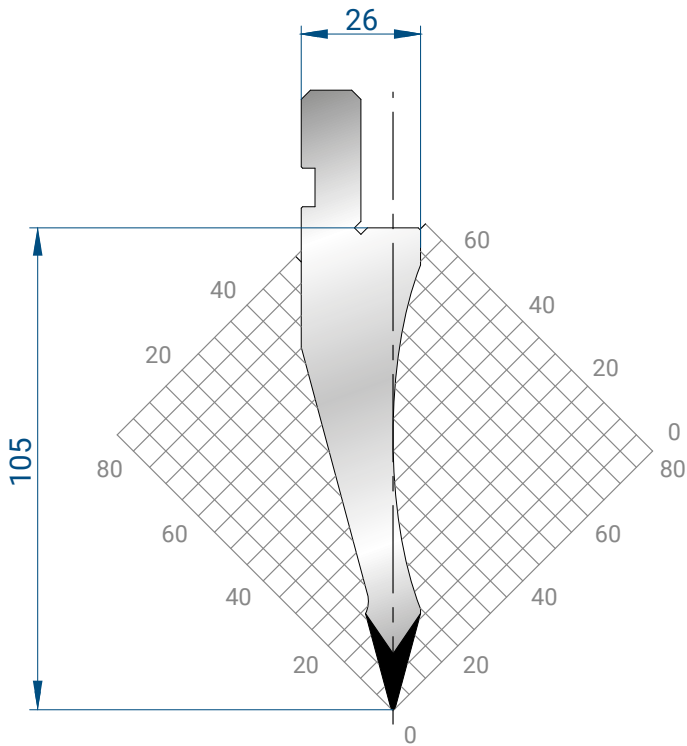

### 1055

Mat = C45  
 H = 105.00  
 Max T/m = 50  
 $\alpha = 30^\circ$   
 R = 0.5


|               |         |
|---------------|---------|
| 835 mm        | 15,0 kg |
| 415 mm        | 7,0 kg  |
| 805 mm        | 15,0 kg |
| FRAZ. / SECT. |         |

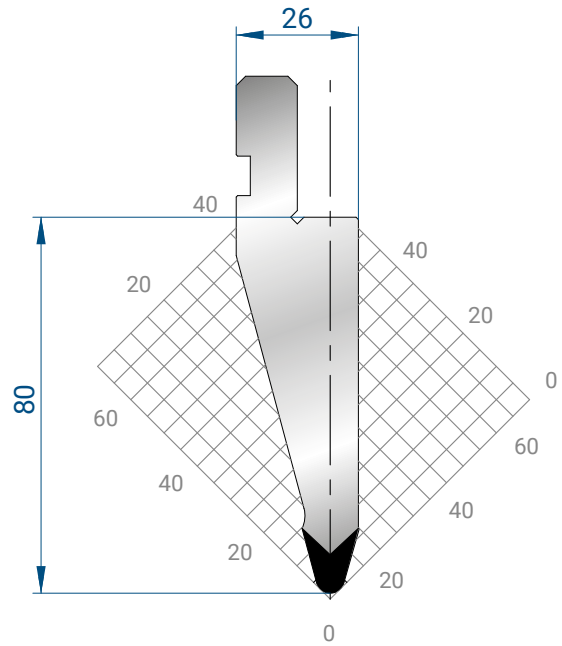

### 1057

Mat = C45  
 H = 80.00  
 Max T/m = 100  
 $\alpha = 30^\circ$   
 R = 3


|               |         |
|---------------|---------|
| 835 mm        | 10,0 kg |
| 415 mm        | 5,0 kg  |
| 805 mm        | 10,0 kg |
| FRAZ. / SECT. |         |

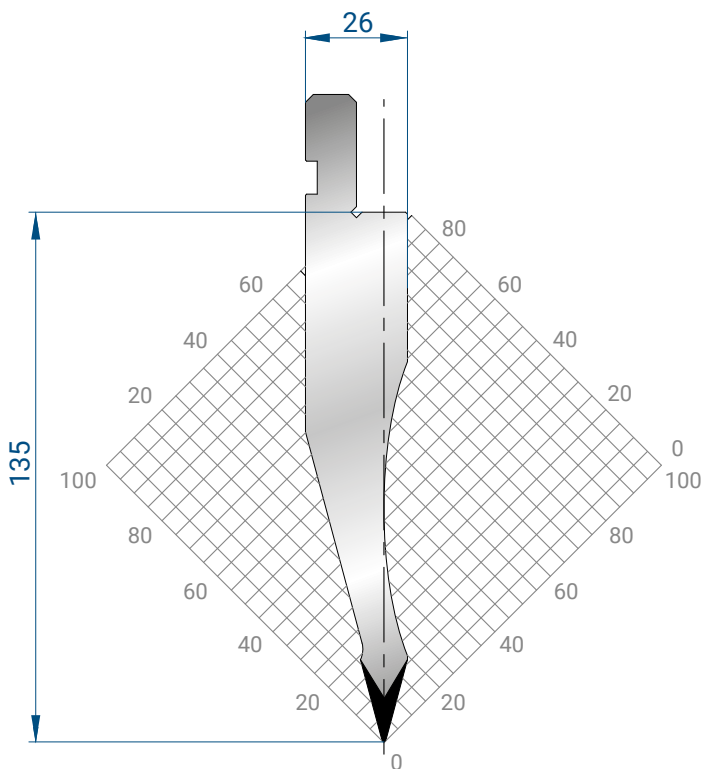

### 1052

Mat = C45  
 H = 135.00  
 Max T/m = 50  
 $\alpha = 30^\circ$   
 R = 0.5


|               |         |
|---------------|---------|
| 835 mm        | 19,0 kg |
| 415 mm        | 9,0 kg  |
| 805 mm        | 19,0 kg |
| FRAZ. / SECT. |         |

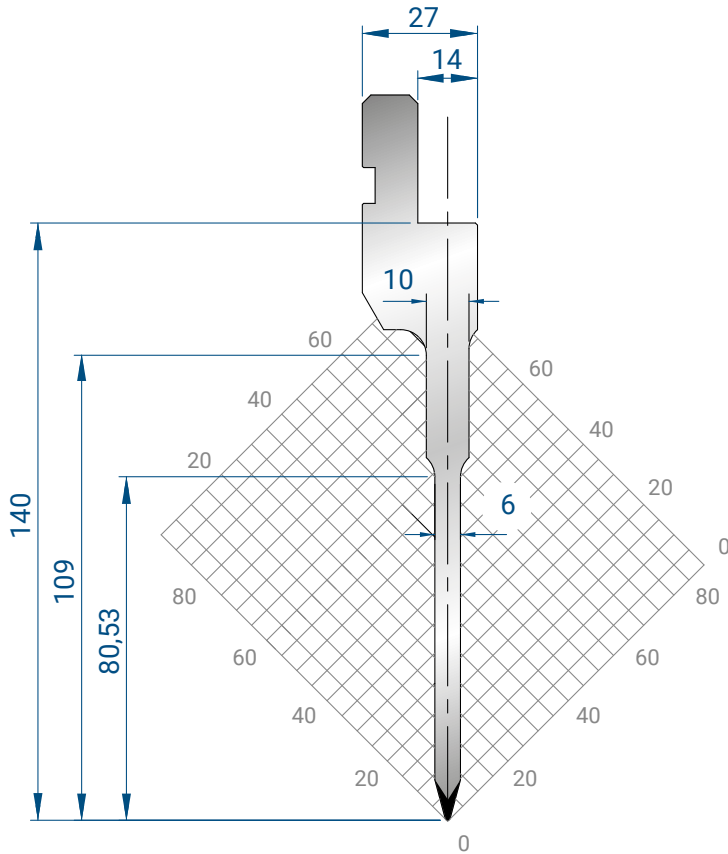

### 1086

Mat = C45  
 bonificato / *tempered*  
 H = 140.00  
 Max T/m = 40  
 $\alpha = 30^\circ$   
 R = 0.6

|               |         |
|---------------|---------|
| 835 mm        | 11,0 kg |
| 415 mm        | 5,0 kg  |
| 805 mm        | 11,0 kg |
| FRAZ. / SECT. |         |

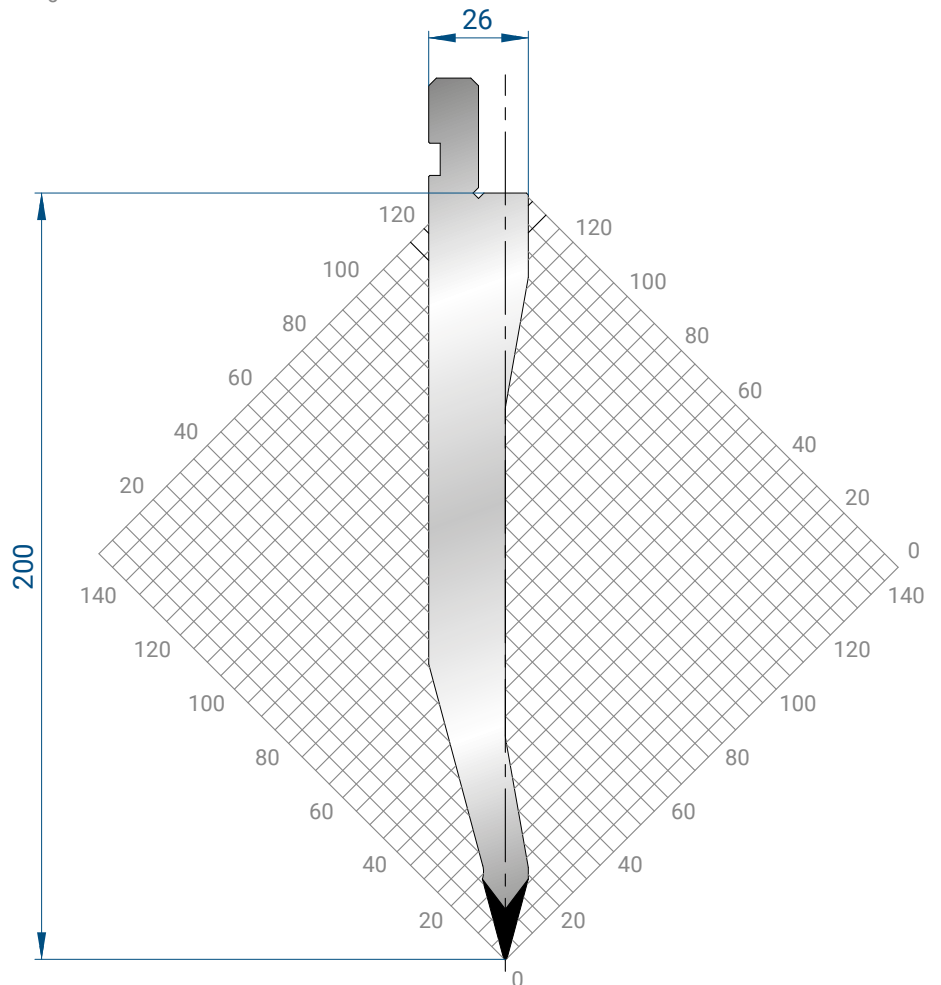

### 1292

Mat = C45  
 H = 200.00  
 Max T/m = 50  
 $\alpha = 30^\circ$   
 R = 0.5

|               |         |
|---------------|---------|
| 835 mm        | 25,0 kg |
| 415 mm        | 13,0 kg |
| 805 mm        | 25,0 kg |
| FRAZ. / SECT. |         |