


1035

Mat = C45
 H = 80.00
 Max T/m = 70
 $\alpha = 35^\circ$
 R = 0.5


835 mm	11,0 kg
415 mm	5,0 kg
805 mm	11,0 kg
FRAZ. / SECT.	

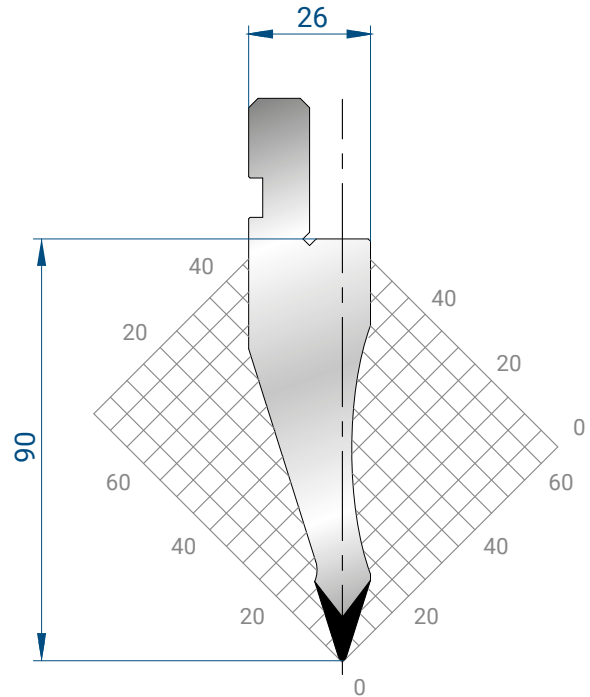

1047

Mat = C45
 H = 90.00
 Max T/m = 70
 $\alpha = 35^\circ$
 R = 0.8


835 mm	12,0 kg
415 mm	6,0 kg
805 mm	12,0 kg
FRAZ. / SECT.	

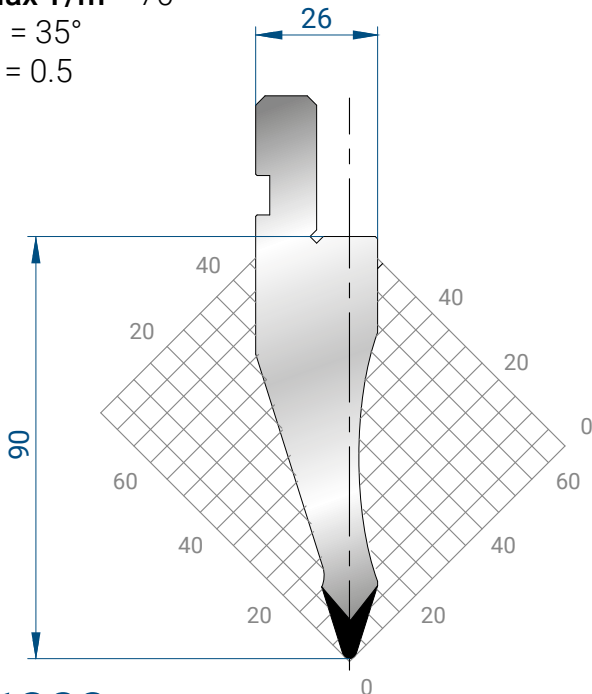

1282

Mat = C45
 H = 90.00
 Max T/m = 70
 $\alpha = 35^\circ$
 R = 1.5

835 mm	12,0 kg
415 mm	6,0 kg
805 mm	12,0 kg
FRAZ. / SECT.	

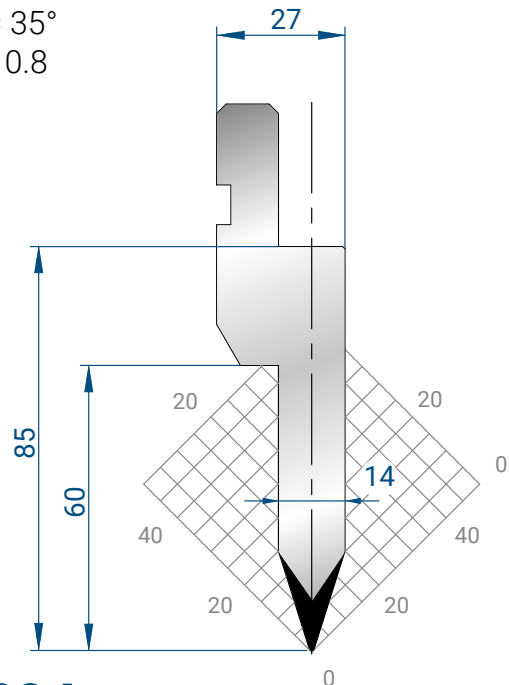

1034

Mat = C45
 H = 85.00
 Max T/m = 100
 $\alpha = 35^\circ$
 P = 0.8

835 mm	10,0 kg
415 mm	5,0 kg
805 mm	10,0 kg
FRAZ. / SECT.	