


### 1053

Mat = C45  
 H = 100.00  
 Max T/m = 100  
 $\alpha = 45^\circ$   
 R = 6


|               |         |
|---------------|---------|
| 835 mm        | 19,0 kg |
| 415 mm        | 9,0 kg  |
| 805 mm        | 19,0 kg |
| FRAZ. / SECT. |         |

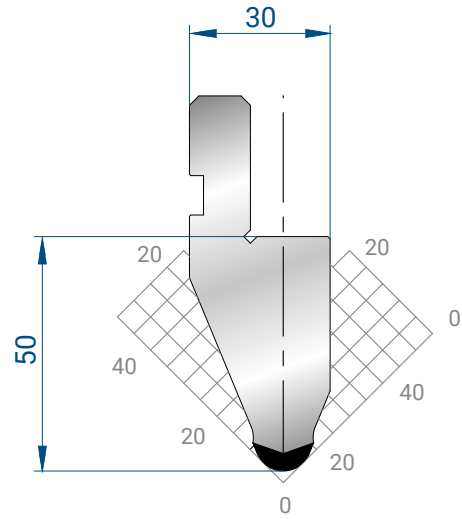

### 1054

Mat = C45  
 H = 50.00  
 Max T/m = 100  
 $\alpha = 45^\circ$   
 R = 6


|               |        |
|---------------|--------|
| 835 mm        | 9,0 kg |
| 415 mm        | 4,0 kg |
| 805 mm        | 9,0 kg |
| FRAZ. / SECT. |        |

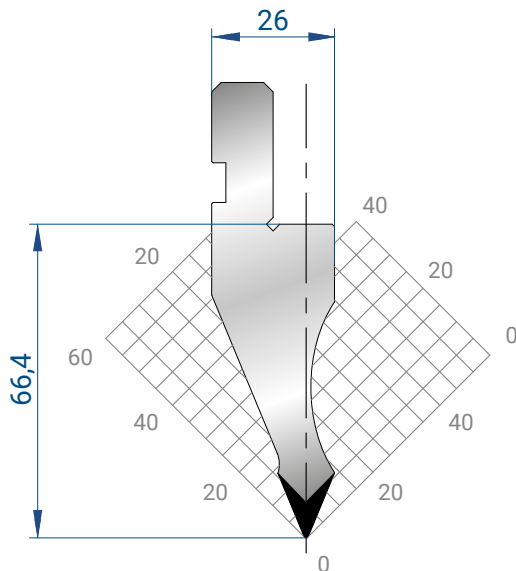

### 1024

Mat = C45  
 H = 66.40  
 Max T/m = 80  
 $\alpha = 45^\circ$   
 R = 0.5

|               |         |
|---------------|---------|
| 835 mm        | 10,0 kg |
| 415 mm        | 5,0 kg  |
| 805 mm        | 10,0 kg |
| FRAZ. / SECT. |         |

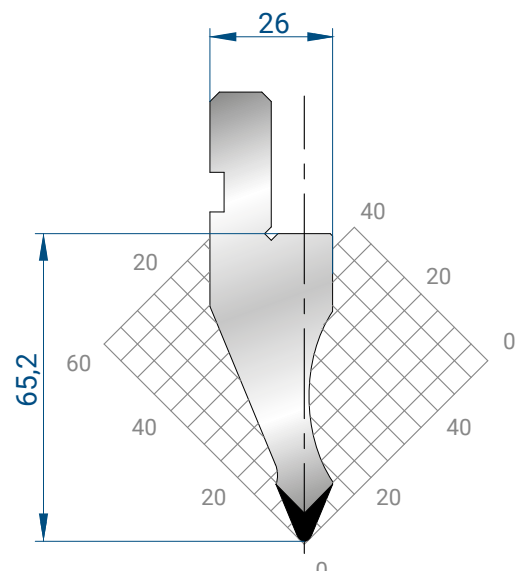

### 1025

Mat = C45  
 H = 65.20  
 Max T/m = 80  
 $\alpha = 45^\circ$   
 R = 1.5

|               |         |
|---------------|---------|
| 835 mm        | 10,0 kg |
| 415 mm        | 5,0 kg  |
| 805 mm        | 10,0 kg |
| FRAZ. / SECT. |         |