


**1191**

**Mat** = C45  
**H** = 115.00  
**Max T/m** = 60  
 $\alpha$  = 60°  
**R** = 0.8


835 mm	15,0 kg
415 mm	7,0 kg
805 mm	15,0 kg
FRAZ. / SECT.	

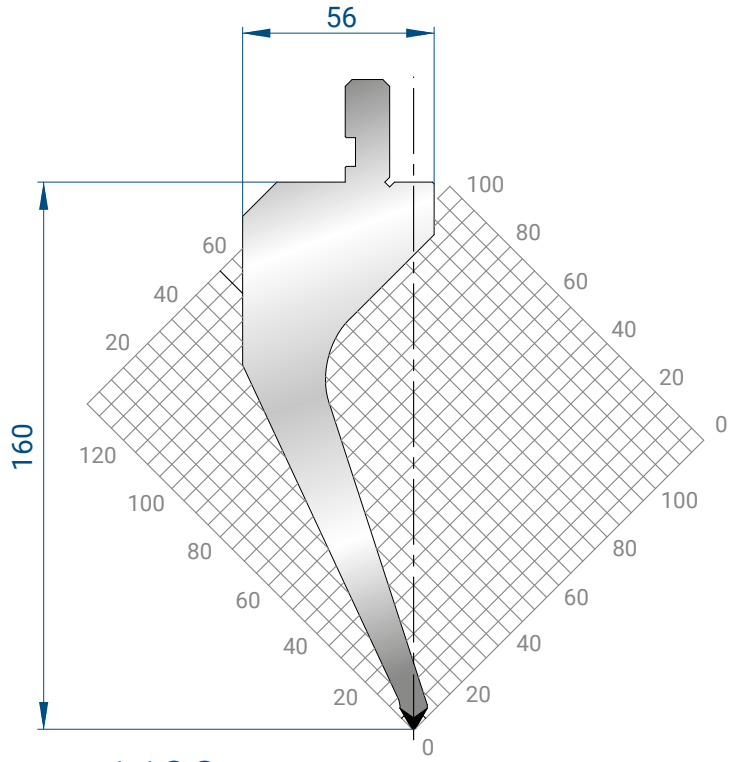

**1190**

**Mat** = C45  
 bonificato / *tempered*  
**H** = 160.00  
**Max T/m** = 40  
 $\alpha$  = 60°  
**R** = 0.8


835 mm	27,0 kg
415 mm	13,5 kg
805 mm	27,0 kg
FRAZ. / SECT.	

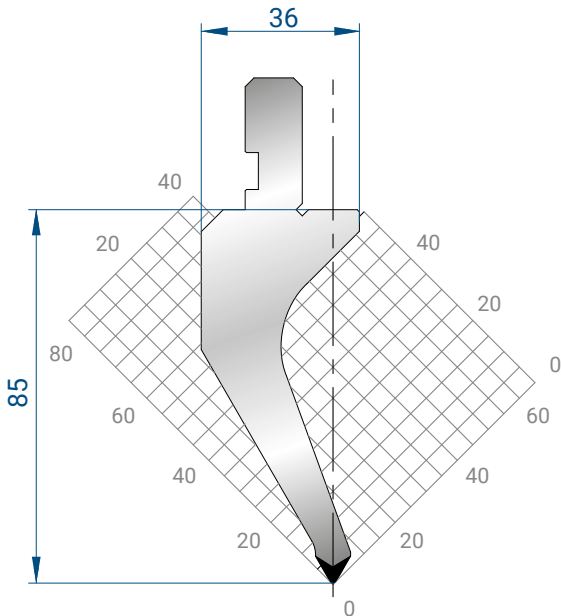

**1162**

**Mat** = 42CrMo4  
 bonificato / *tempered*  
**H** = 85.00  
**Max T/m** = 40  
 $\alpha$  = 60°  
**R** = 0.8


835 mm	12,0 kg
415 mm	6,0 kg
805 mm	12,0 kg
FRAZ. / SECT.	

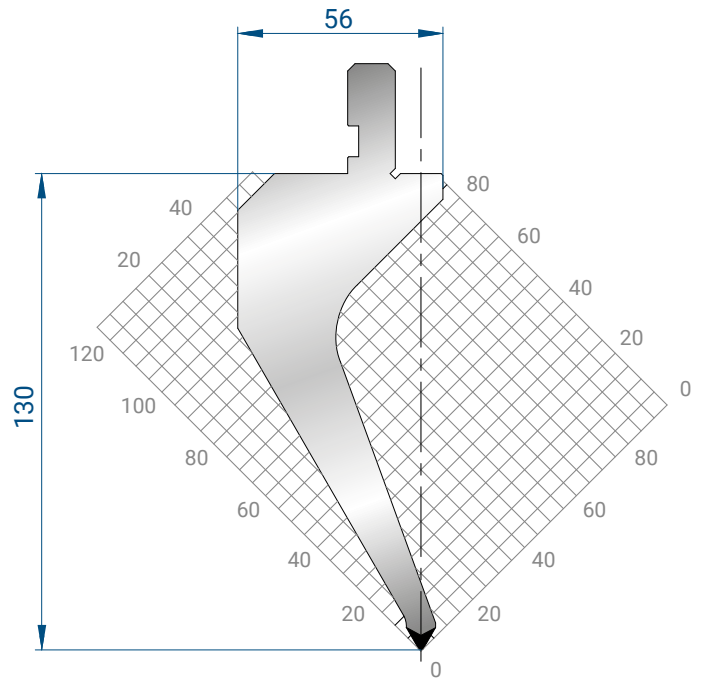

**1163**

**Mat** = C45  
 bonificato / *tempered*  
**H** = 130.00  
**Max T/m** = 40  
 $\alpha$  = 60°  
**R** = 0.8


835 mm	23,0 kg
415 mm	11,0 kg
805 mm	23,0 kg
FRAZ. / SECT.	

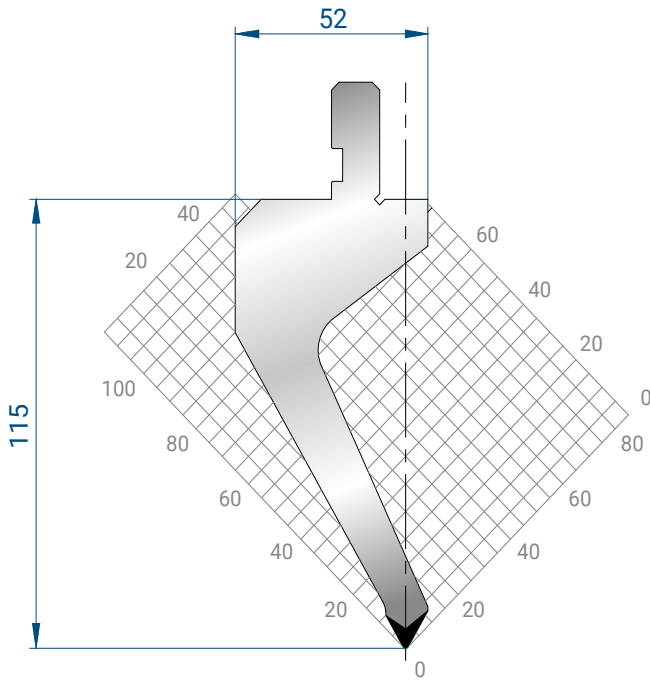

### 1272

**Mat** = C45  
 bonificato / *tempered*  
**H** = 115.00  
**Max T/m** = 40  
 $\alpha$  = 60°  
**R** = 0.8


835 mm	20,0 kg
415 mm	10,0 kg
805 mm	20,0 kg
FRAZ. / SECT.	

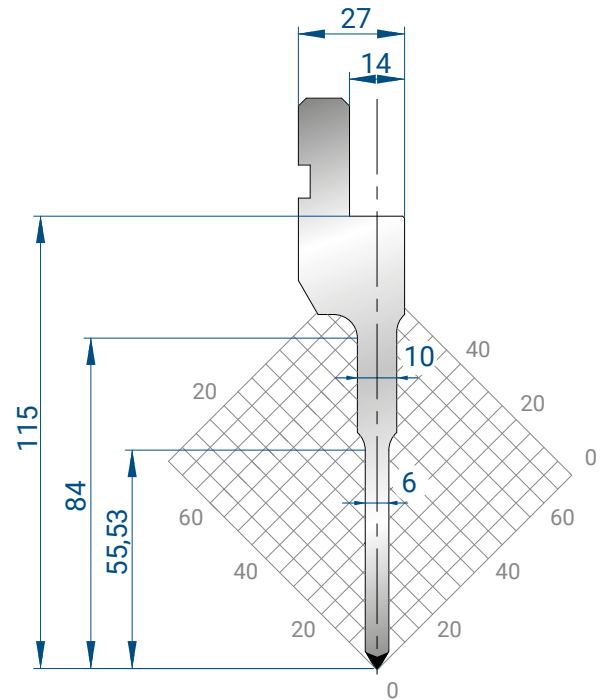

### 1271

**Mat** = C45  
 bonificato / *tempered*  
**H** = 115.00  
**Max T/m** = 50  
 $\alpha$  = 60°  
**R** = 0.8


835 mm	9,0 kg
415 mm	4,0 kg
805 mm	9,0 kg
FRAZ. / SECT.	

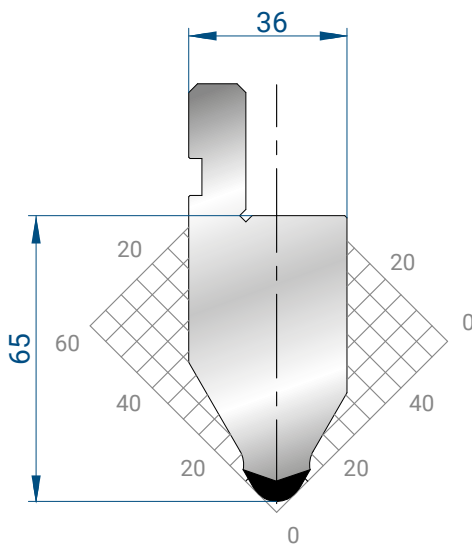

### 1032

**Mat** = C45  
**H** = 65.00  
**Max T/m** = 120  
 $\alpha$  = 60°  
**R** = 6


835 mm	14,0 kg
415 mm	7,0 kg
805 mm	14,0 kg
FRAZ. / SECT.	

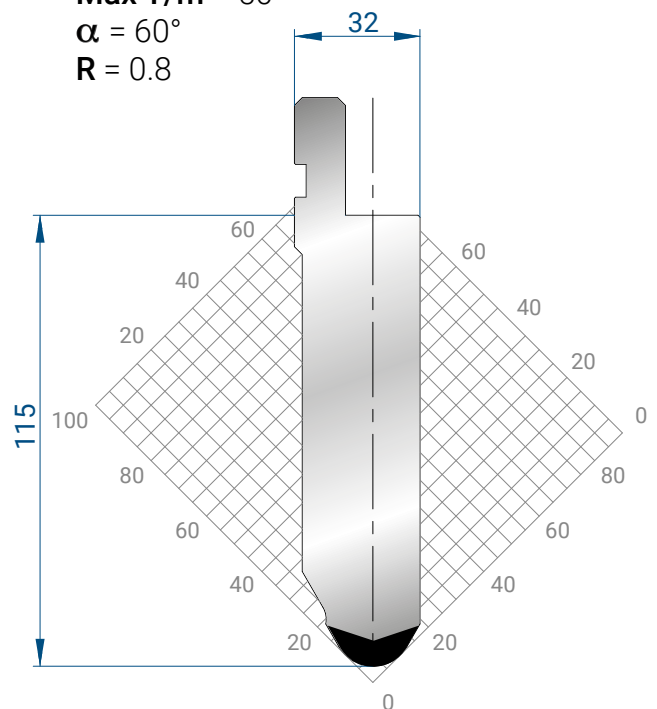

### 1283

**Mat** = C45  
**H** = 115.00  
**Max T/m** = 150  
 $\alpha$  = 60°  
**R** = 10


835 mm	25,0 kg
415 mm	12,0 kg
805 mm	25,0 kg
FRAZ. / SECT.	

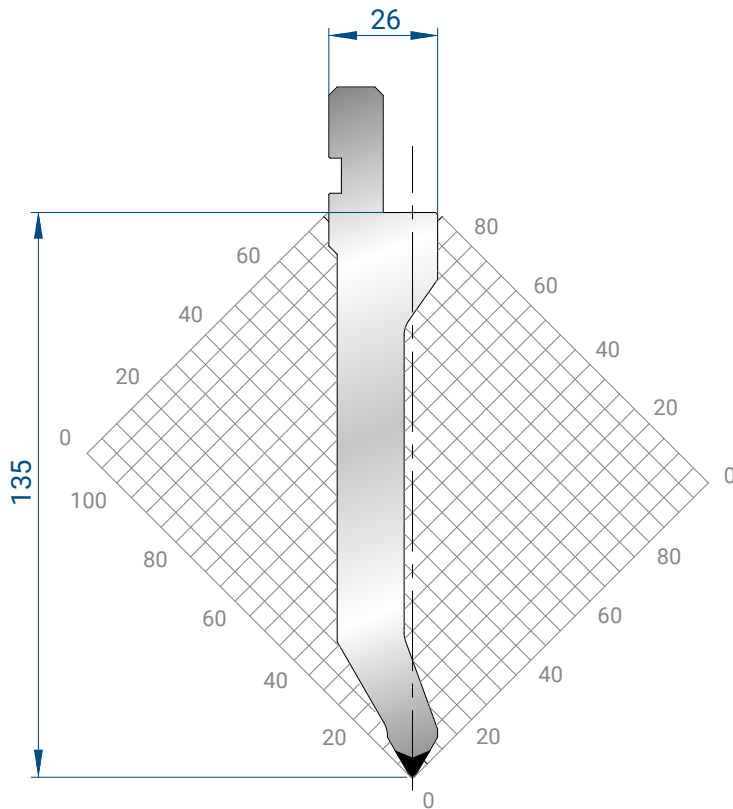

## 1284

**Mat = C45**  
**H = 135.00**  
**Max T/m = 70**  
 **$\alpha = 60^\circ$**   
**R = 0.8**

835 mm	19,0 kg
415 mm	9,0 kg
805 mm	19,0 kg
FRAZ. / SECT.	

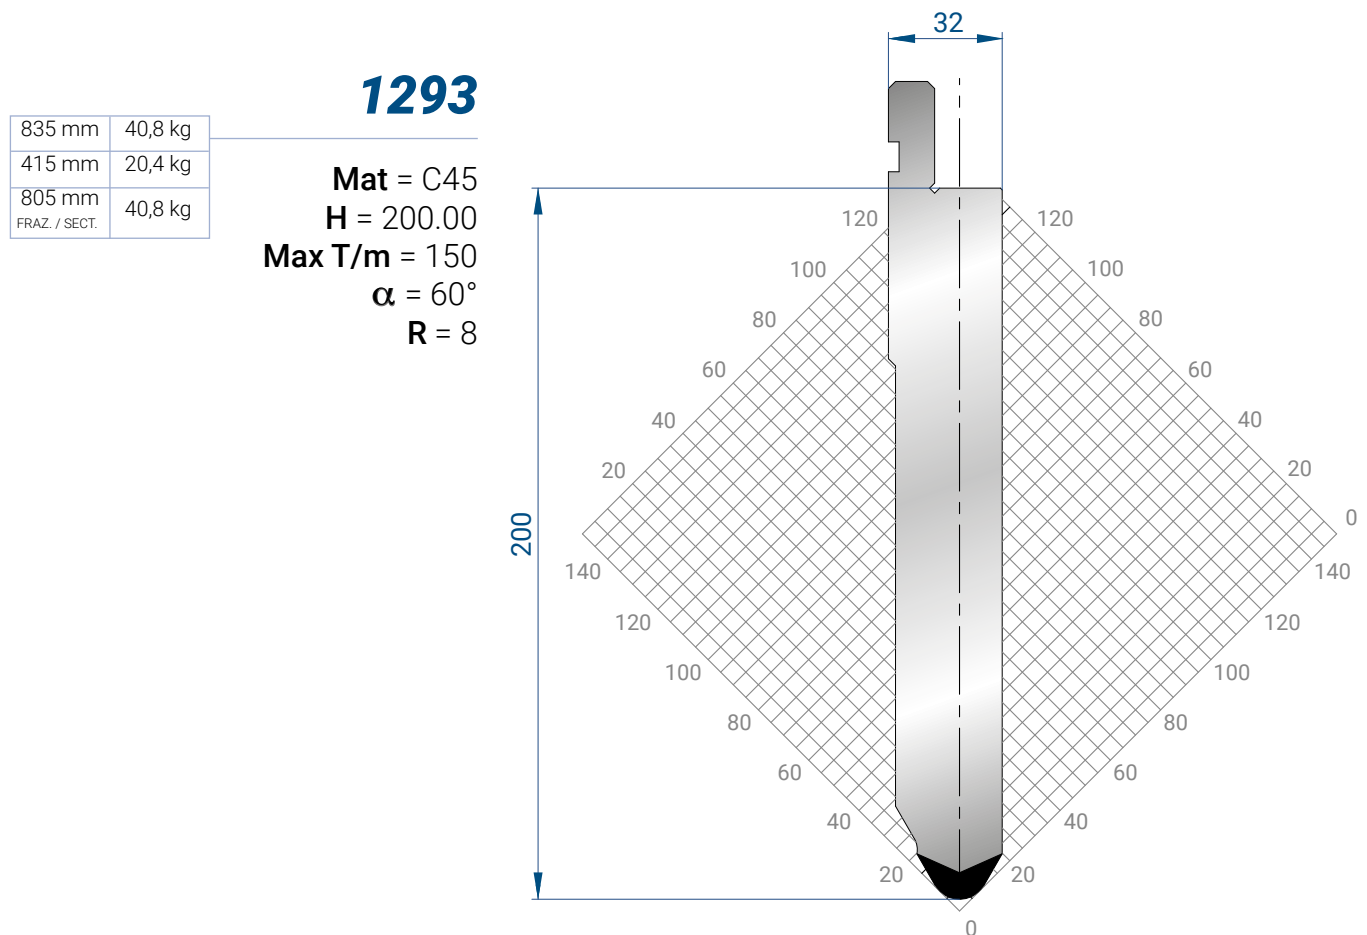

## 1293

**Mat = C45**  
**H = 200.00**  
**Max T/m = 150**  
 **$\alpha = 60^\circ$**   
**R = 8**

835 mm	40,8 kg
415 mm	20,4 kg
805 mm	40,8 kg
FRAZ. / SECT.	