


1011

Mat = C45
 H = 66.65
 Max T/m = 100
 $\alpha = 88^\circ$
 R = 0.8


835 mm	11,0 kg
415 mm	5,0 kg
805 mm	11,0 kg
FRAZ. / SECT.	

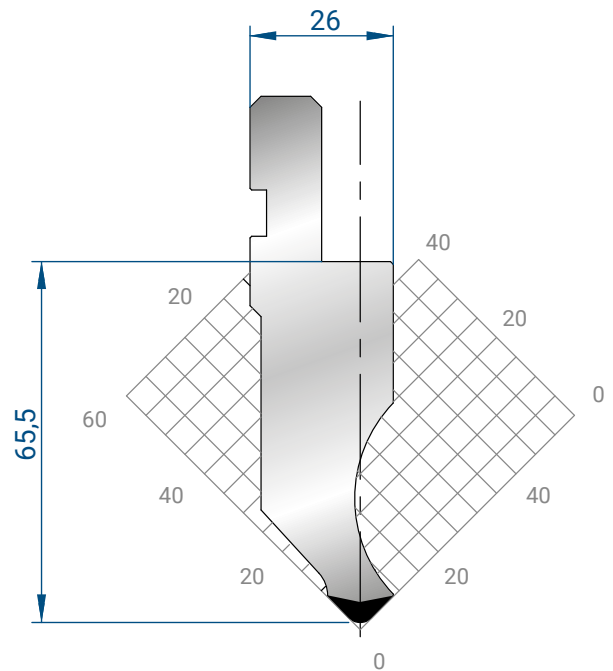

1012

Mat = C45
 H = 65.50
 Max T/m = 100
 $\alpha = 88^\circ$
 R = 3


835 mm	11,0 kg
415 mm	4,5 kg
805 mm	11,0 kg
FRAZ. / SECT.	

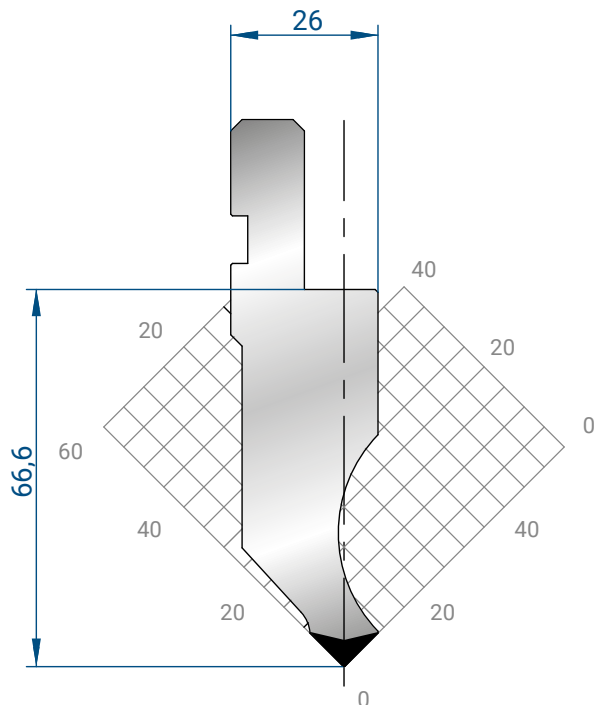

1065

Mat = C45
 H = 66.60
 Max T/m = 100
 $\alpha = 88^\circ$
 R = 0.25


835 mm	11,0 kg
415 mm	5,0 kg
805 mm	11,0 kg
FRAZ. / SECT.	

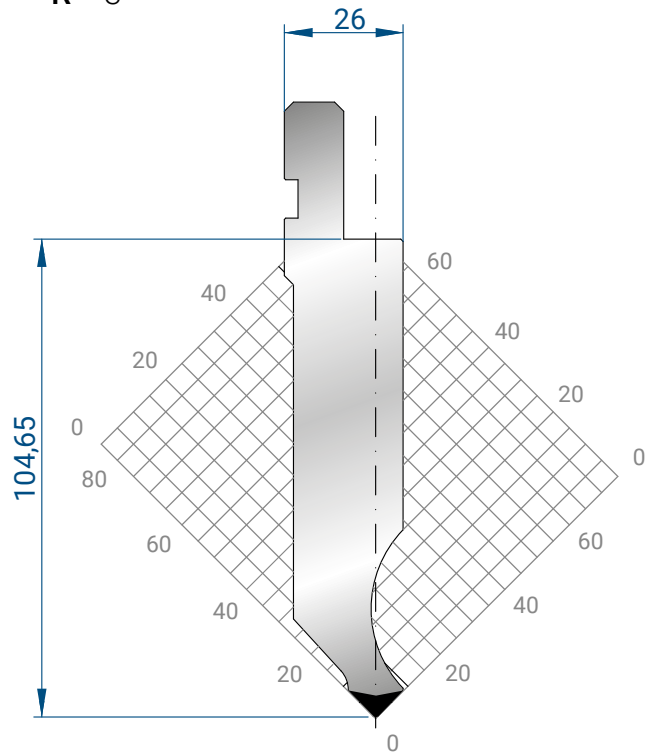

1063

Mat = C45
 H = 104.65
 Max T/m = 100
 $\alpha = 88^\circ$
 R = 0.8


835 mm	17,0 kg
415 mm	9,0 kg
805 mm	17,0 kg
FRAZ. / SECT.	

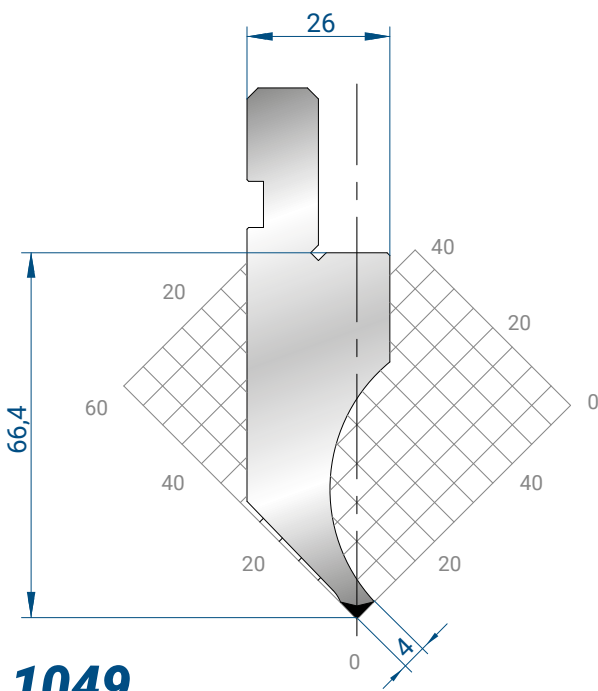

1049

Mat = C45
 bonificato / *tempered*
H = 66.40
Max T/m = 35
 α = 88°
R = 0.6


835 mm	11,0 kg
415 mm	5,0 kg
805 mm	11,0 kg
FRAZ. / SECT.	

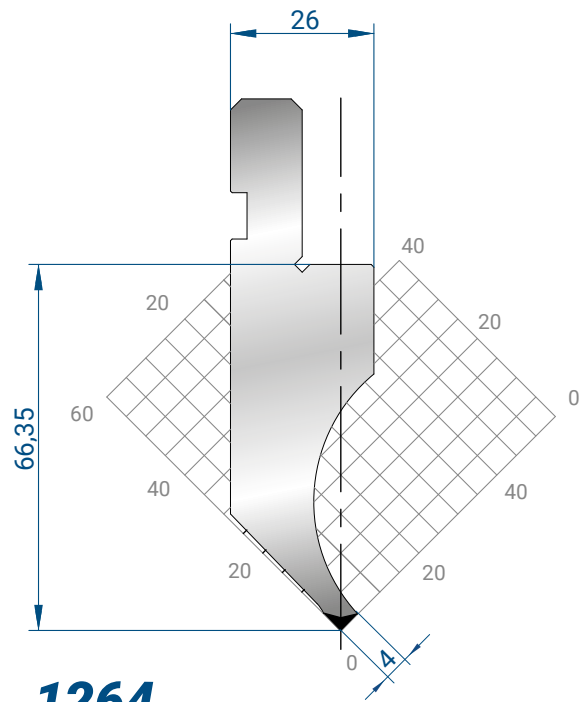

1264

Mat = C45
 bonificato / *tempered*
H = 66.35
Max T/m = 35
 α = 88°
R = 0.25


835 mm	11,0 kg
415 mm	5,0 kg
805 mm	11,0 kg
FRAZ. / SECT.	

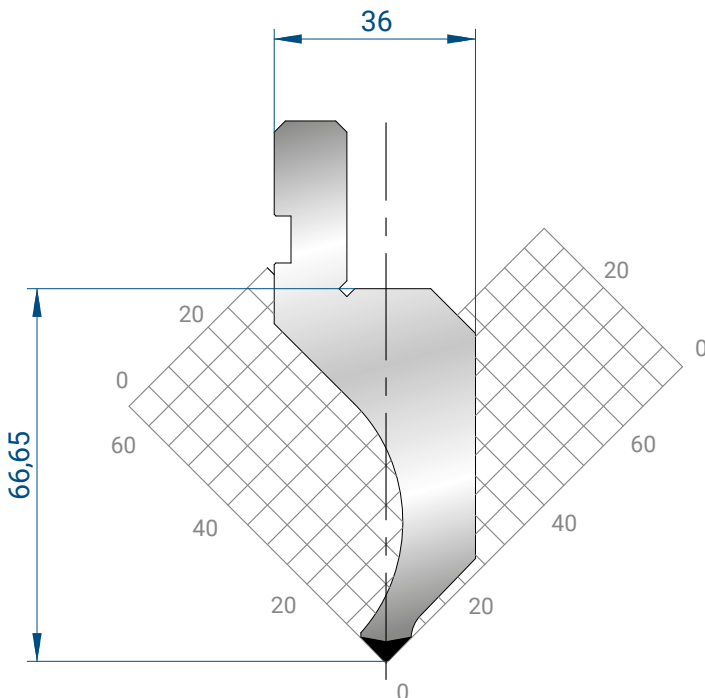

1081

Mat = C45
H = 66.65
Max T/m = 60
 α = 88°
R = 0.8


835 mm	12,0 kg
415 mm	6,0 kg
805 mm	12,0 kg
FRAZ. / SECT.	

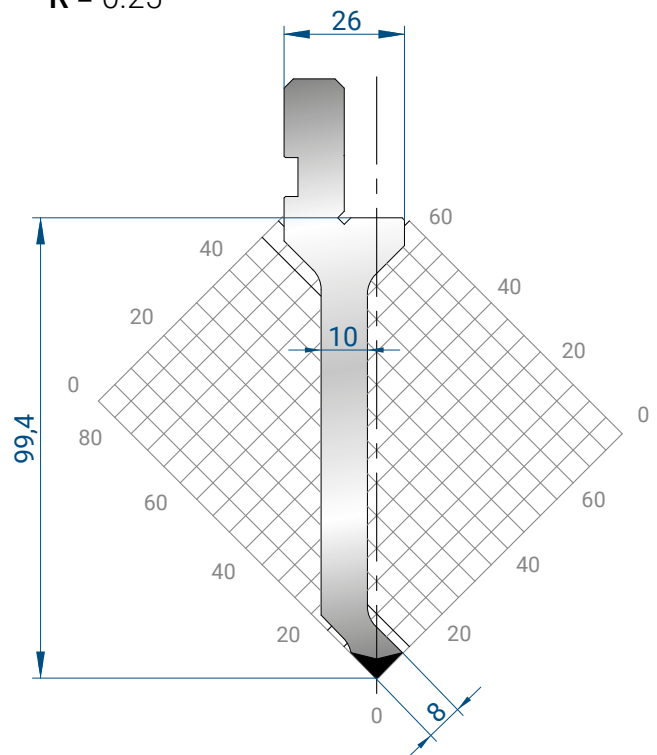

1029

Mat = C45
H = 99.40
Max T/m = 50
 α = 88°
R = 0.6


835 mm	10,0 kg
415 mm	5,0 kg
805 mm	10,0 kg
FRAZ. / SECT.	

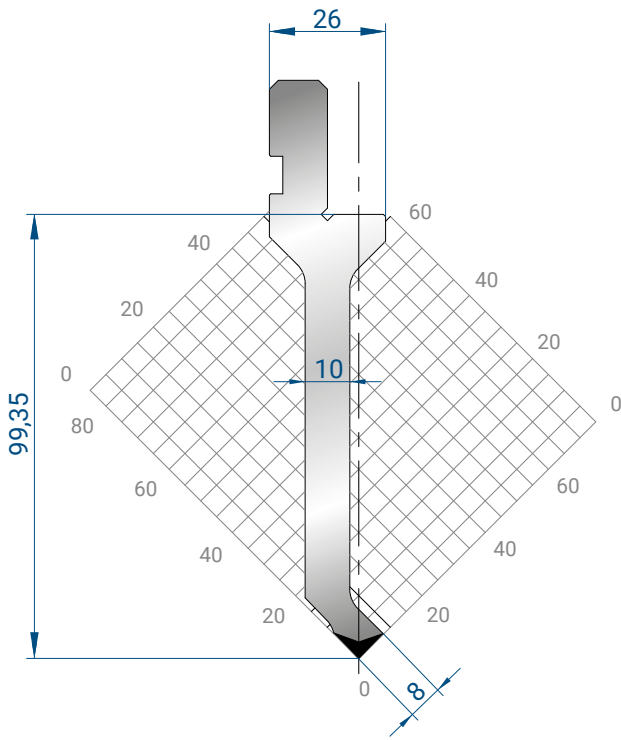

1262

Mat = C45
H = 99.35
Max T/m = 50
 α = 88°
R = 0.25


835 mm	9,0 kg
415 mm	4,0 kg
805 mm	9,0 kg
FRAZ. / SECT.	

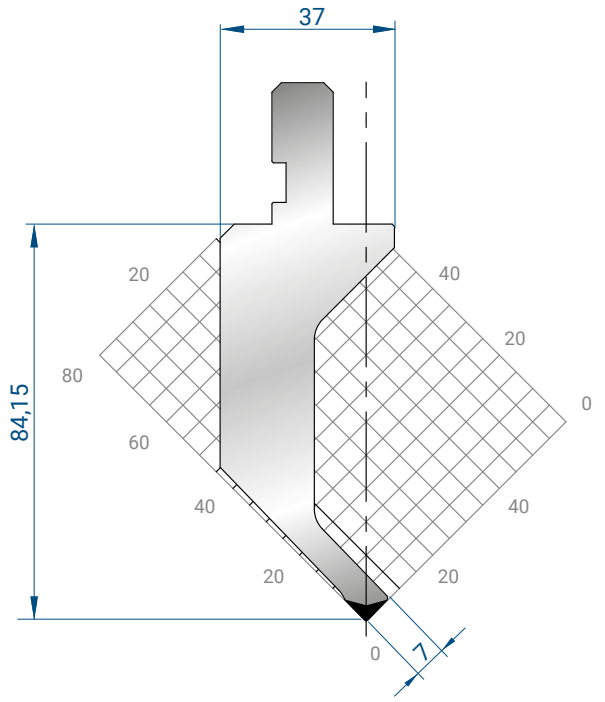

1020

Mat = 42CrMo4
 bonificato / tempered
H = 84.15
Max T/m = 20
 α = 88°
R = 0.6


835 mm	14,0 kg
415 mm	7,0 kg
805 mm	14,0 kg
FRAZ. / SECT.	

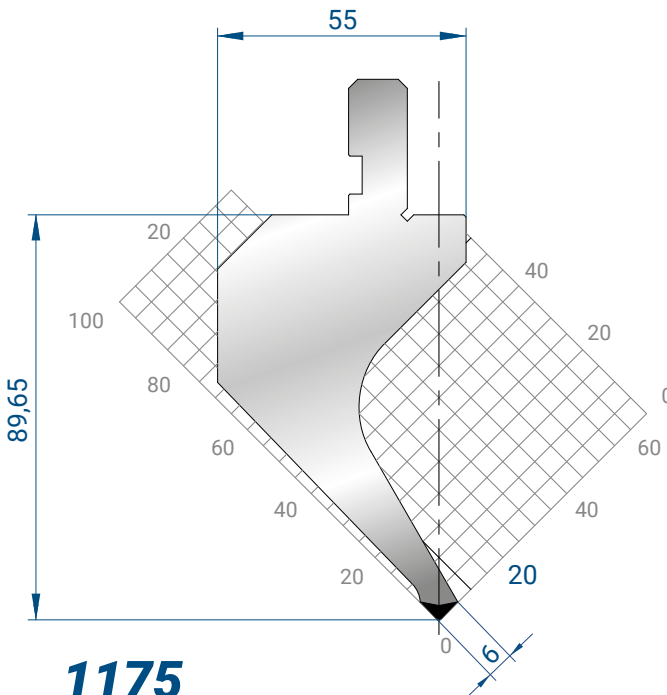

1175

Mat = C45
 bonificato / tempered
H = 89.65
Max T/m = 50
 α = 88°
R = 0.8


835 mm	21,0 kg
415 mm	10,0 kg
805 mm	21,0 kg
FRAZ. / SECT.	

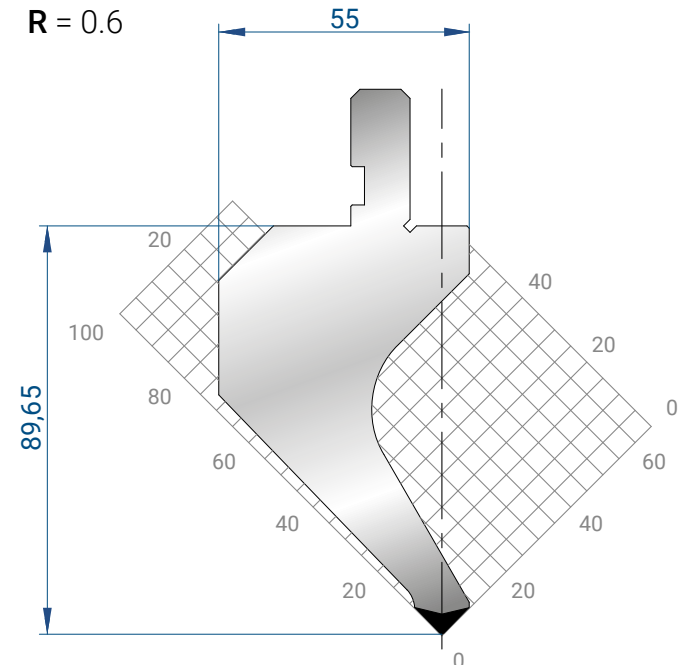

1014

Mat = C45
H = 89.65
Max T/m = 60
 α = 88°
R = 0.8


835 mm	21,0 kg
415 mm	10,5 kg
805 mm	21,0 kg
FRAZ. / SECT.	

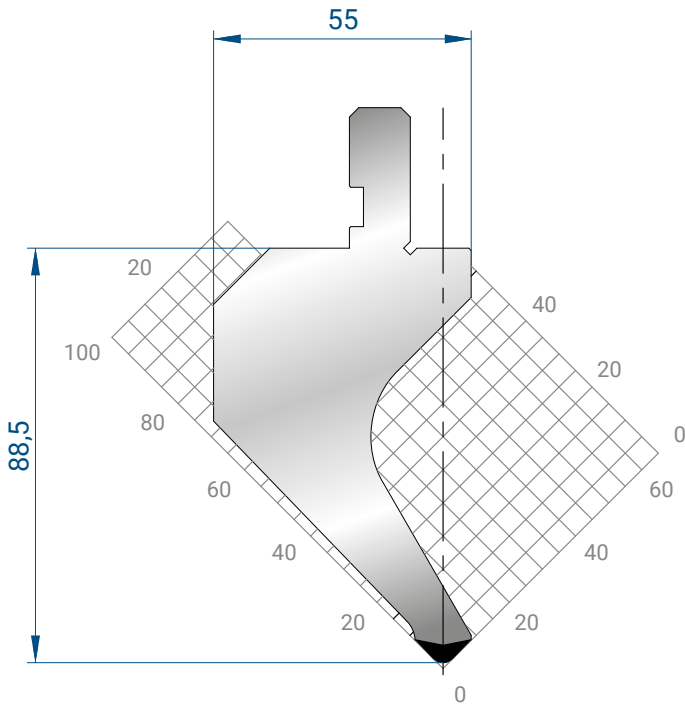

1015

Mat = C45
 H = 88.50
 Max T/m = 60
 $\alpha = 88^\circ$
 R = 3


835 mm	21,0 kg
415 mm	10,5 kg
805 mm	21,0 kg
FRAZ. / SECT.	

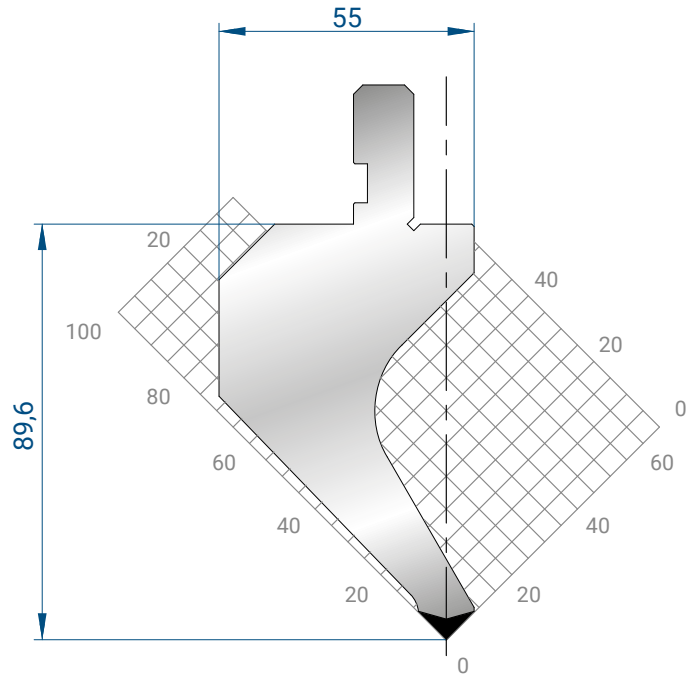

1266

Mat = C45
 H = 89.60
 Max T/m = 60
 $\alpha = 88^\circ$
 R = 0.25


835 mm	21,0 kg
415 mm	10,0 kg
805 mm	21,0 kg
FRAZ. / SECT.	

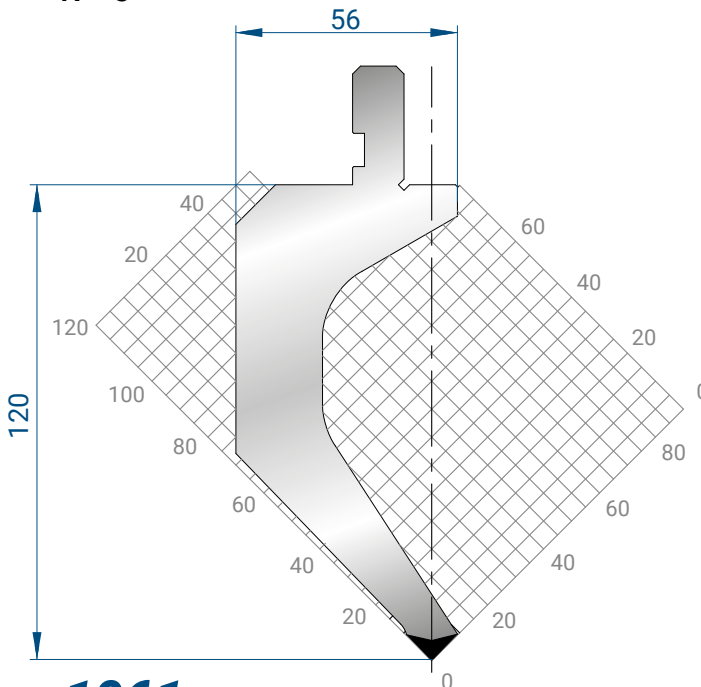

1061

Mat = C45
 bonificato / tempered
 H = 120
 Max T/m = 50
 $\alpha = 88^\circ$
 R = 0.8


835 mm	24,0 kg
415 mm	12,0 kg
805 mm	24,0 kg
FRAZ. / SECT.	

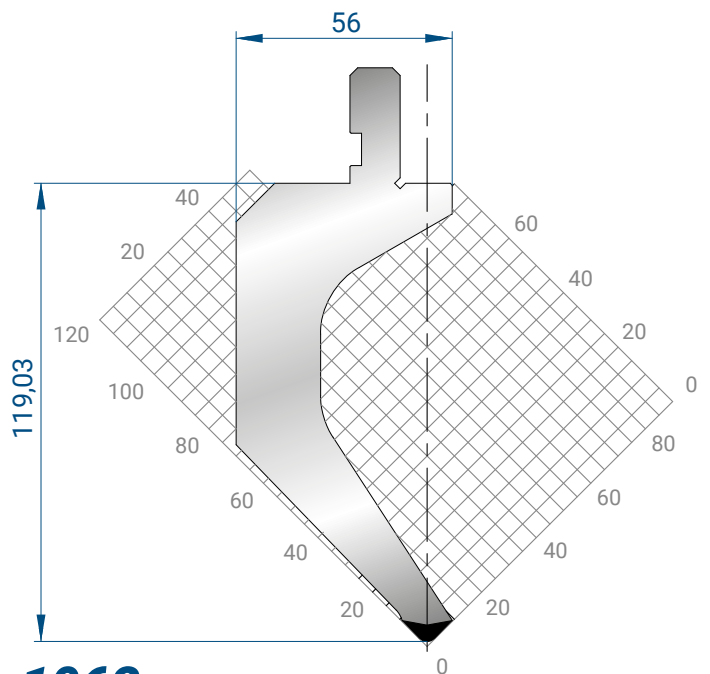

1062

Mat = C45
 bonificato / tempered
 H = 119.03
 Max T/m = 50
 $\alpha = 88^\circ$
 R = 3


835 mm	24,0 kg
415 mm	12,0 kg
805 mm	24,0 kg
FRAZ. / SECT.	

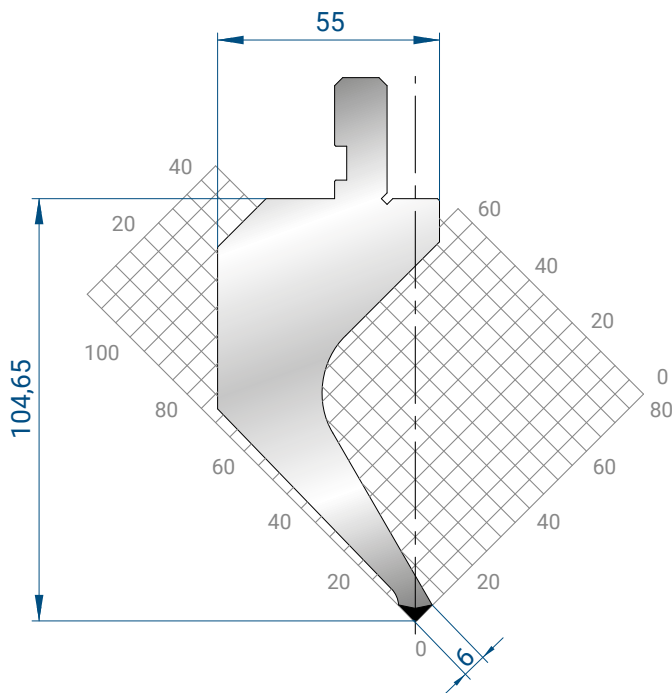

1173

Mat = C45
 bonificato / tempered
 H = 104.65
 Max T/m = 50
 $\alpha = 88^\circ$
 R = 0.8


835 mm	23,0 kg
415 mm	11,0 kg
805 mm	23,0 kg
FRAZ. / SECT.	

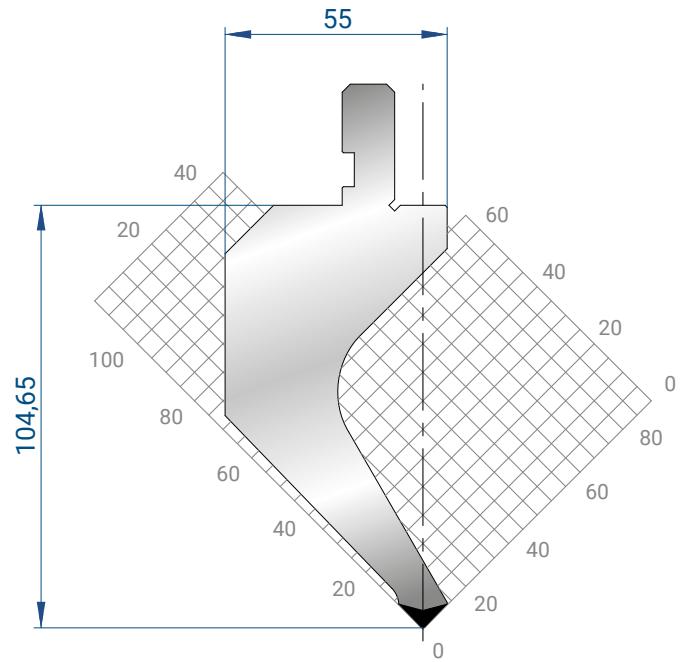

1017

Mat = C45
 H = 104.65
 Max T/m = 50
 $\alpha = 88^\circ$
 R = 0.8


835 mm	23,0 kg
415 mm	11,0 kg
805 mm	23,0 kg
FRAZ. / SECT.	

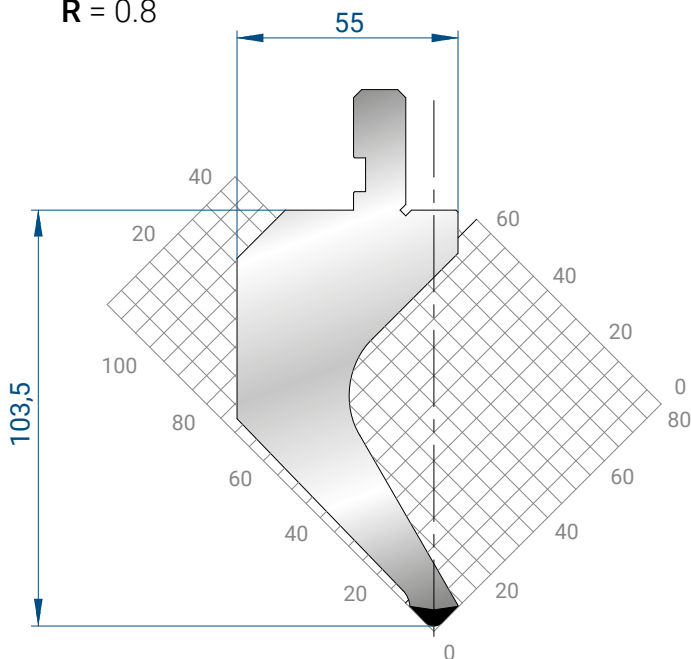

1018

Mat = C45
 H = 103.50
 Max T/m = 50
 $\alpha = 88^\circ$
 R = 3


835 mm	23,0 kg
415 mm	11,0 kg
805 mm	23,0 kg
FRAZ. / SECT.	

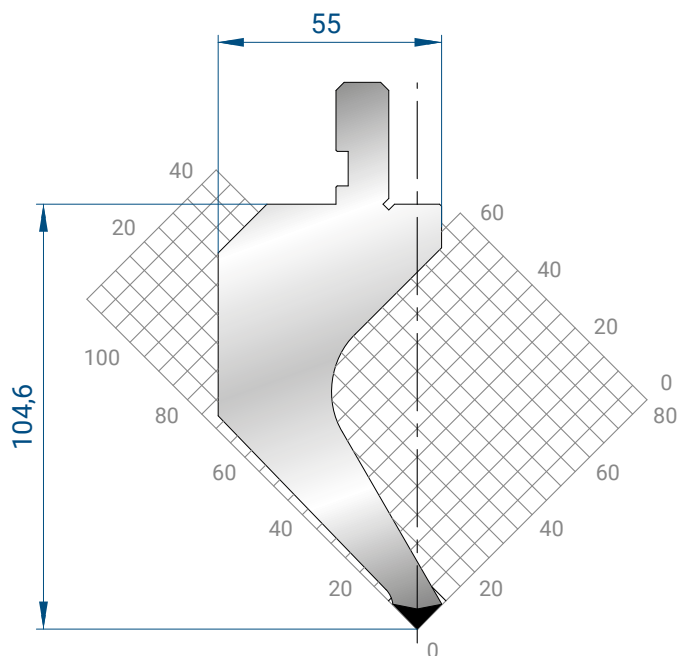

1268

Mat = C45
 H = 104.60
 Max T/m = 50
 $\alpha = 88^\circ$
 R = 0.25


835 mm	23,0 kg
415 mm	11,0 kg
805 mm	23,0 kg
FRAZ. / SECT.	

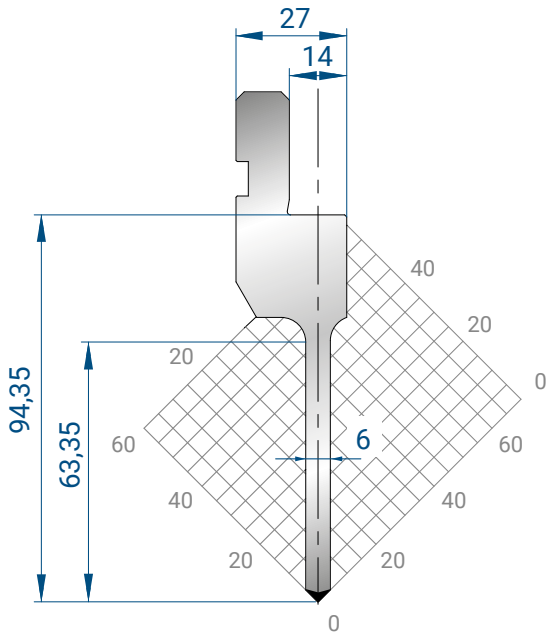

1270

Mat = C45
 bonificato/ *tempered*
H = 94.35
Max T/m = 50
 α = 88°
R = 0.25


835 mm	8,0 kg
415 mm	4,0 kg
805 mm	8,0 kg
FRAZ. / SECT.	

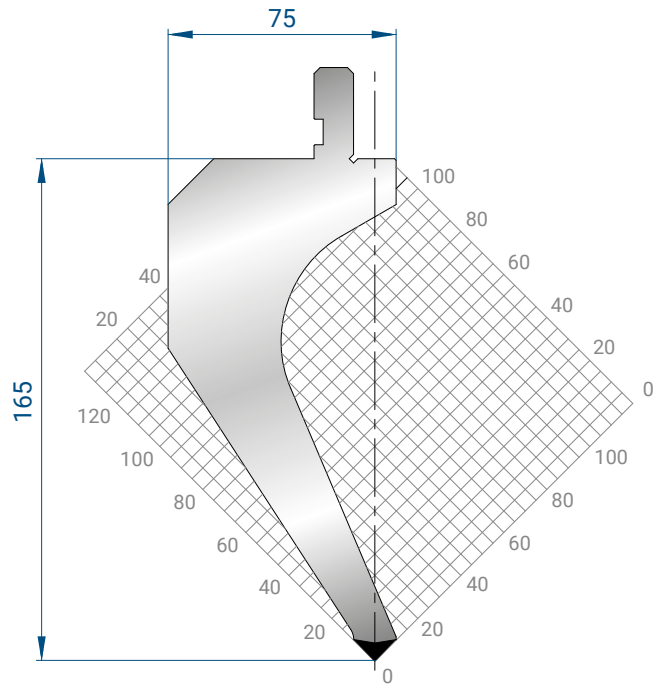

1031

Mat = C45
H = 165
Max T/m = 60
 α = 88°
R = 0.8


835 mm	41,0 kg
415 mm	20,0 kg
805 mm	41,0 kg
FRAZ. / SECT.	

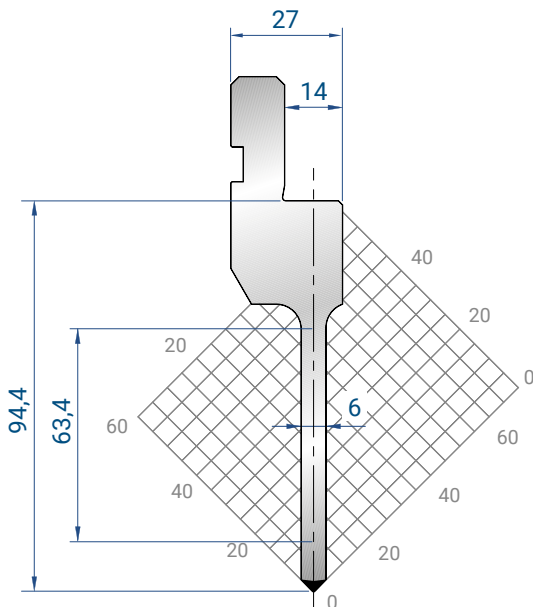

1084

Mat = C45
 bonificato / *tempered*
H = 94.40
Max T/m = 50
 α = 88°
R = 0.6


835 mm	8,0 kg
415 mm	4,0 kg
805 mm	8,0 kg
FRAZ. / SECT.	

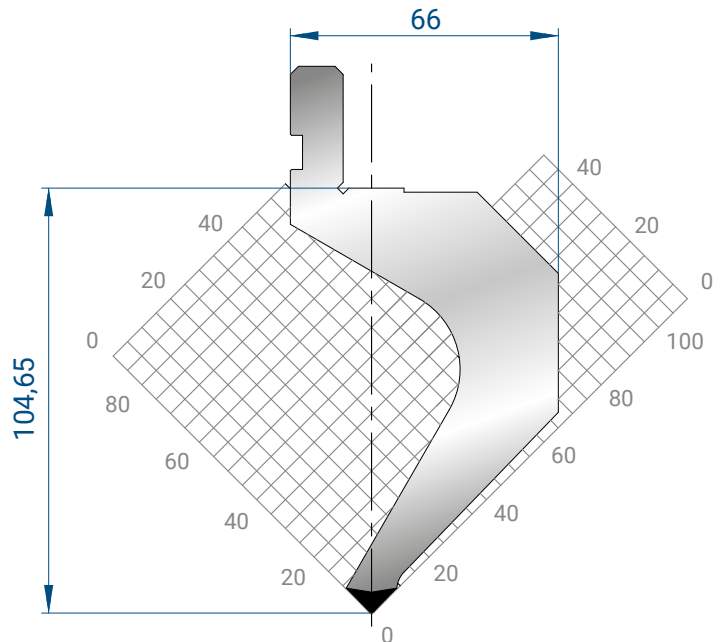

1082

Mat = C45
H = 104.65
Max T/m = 45
 α = 88°
R = 0.8


835 mm	25,0 kg
415 mm	12,0 kg
805 mm	25,0 kg
FRAZ. / SECT.	

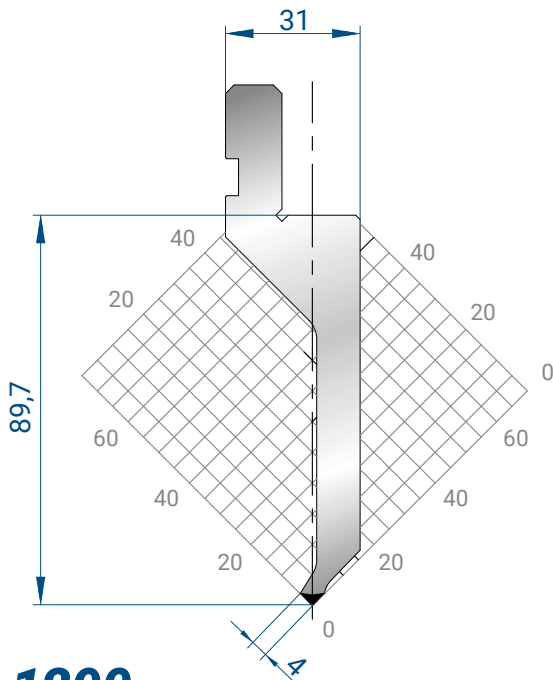

1290

Mat = C45
 bonificato / *tempered*
 H = 89.70
 Max T/m = 30
 $\alpha = 88^\circ$
 R = 0.6


835 mm	10,0 kg
415 mm	5,0 kg
805 mm FRAZ. / SECT.	10,0 kg

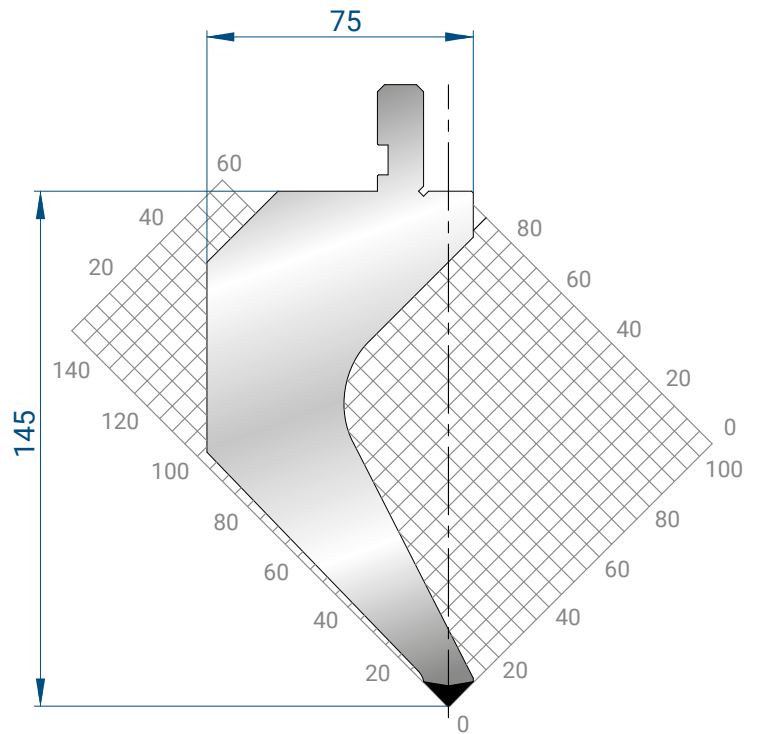

1030

Mat = C45
 H = 145
 Max T/m = 80
 $\alpha = 88^\circ$
 R = 0.8


835 mm	39,0 kg
415 mm	19,0 kg
805 mm FRAZ. / SECT.	39,0 kg

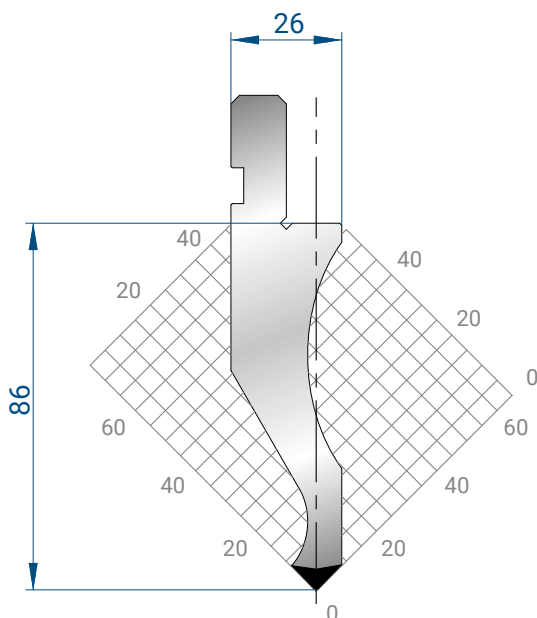

1022

Mat = C45
 H = 86
 Max T/m = 100
 $\alpha = 88^\circ$
 R = 0.8

835 mm	13,0 kg
415 mm	6,0 kg
805 mm FRAZ. / SECT.	13,0 kg

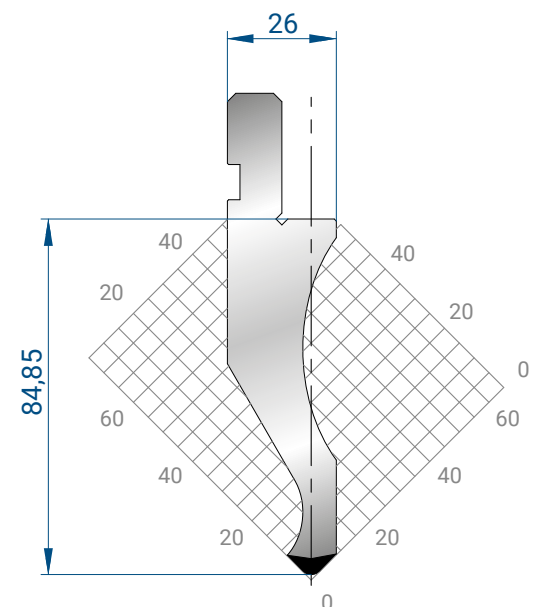

1023

Mat = C45
 H = 84.85
 Max T/m = 100
 $\alpha = 88^\circ$
 R = 3

835 mm	13,0 kg
415 mm	6,0 kg
805 mm FRAZ. / SECT.	13,0 kg

